



负温度系数(NTC)热敏电阻器

Negative temperature coefficient (NTC) thermistor

MF73T大功率型NTC热敏电阻系列

MF73T High-power NTC Thermistor series


● 特点 Characteristics

- 体积小、功率大、抑制浪涌电流能力强
- 材料常数(B值)大,残余电阻小,自身功耗小
- 大电流,长寿命,高可靠性
- 便于线路板安装,系列全,应用范围宽
- Small size, strong power and strong capability of surge current protection .
- Big material constant (B value),small remain resistance .
- Large steady state current ,longevity of service, high reliability .
- Convenient for PCB installing , integral series, extensive operating range


● 应用范围 Applications

- 大功率开关电源、转换电源、UPS电源
- 大功率动力电池充电器、电动汽车充电器
- 大功率LED灯、大功率电子节能灯等照明灯具
- High power switch power , Power conversion ,UPS power .
- High power battery charger, electric vehicle battery charger .
- High power LED light ,high power electronic energy saving lamps and other lighting lamps .

● MF73T-1产品标志说明 Specification

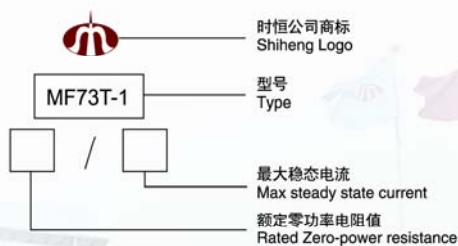

● MF73T-1 外形尺寸(单位mm) Dimensions (mm)

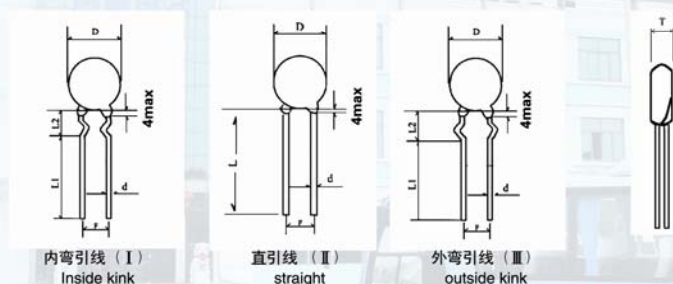

江苏省高新技术产品
The Hi & Tech product of jiangsu province

● 认证 Approval



◎ CQC 认证
(File # 10001053047)



◎ TUV 认证
(File # R50245892)




MF73T大功率型NTC热敏电阻系列


MF73T High-power NTC Thermistor series

本体尺寸	Φ3	Φ5	Φ8	Φ10	Φ13	Φ15	Φ20	Φ25	Φ30	Φ35	Φ40
外径 (Dmax)	4.5	7.0	11.0	13.0	15.5	17.5	22.5	29	35	40	45
厚度 (Tmax)	4.5	5	5.5	5.5	6	6	7	8	10	12	12
间距 (F±1/1.5(Φ30以上))	2.5	2.5	7.5	7.5	7.5	7.5	10.0	10.0	18	18	18
引线直径 (d±0.05)	0.45	0.45	0.8	0.8	0.8	0.8	1.0	1.0	1.6	2.0	2.0 (2.6)
引线长度 (L) min	25	25	25	25	25	25	25	25	25	25	25
引线长度 (L1) min	/	/	17	17	17	17	17	17	/	/	/
常规引线形状 Regular load Shape	直线 (Ⅱ) straight	直线 (Ⅱ) straight	内弯 (Ⅰ) inside kink	内弯 (Ⅰ) inside kink	内弯 (Ⅰ) inside kink	内弯 (Ⅰ) inside kink	直线 (Ⅱ) straight	直线 (Ⅱ) straight	直线 (Ⅱ) straight	直线 (Ⅱ) straight	直线 (Ⅱ) straight
非常规引线形状 Special load Shape	/	/	直线 (Ⅱ) straight	直线 (Ⅱ) straight	直线 (Ⅱ) straight	直线 (Ⅱ) straight	外弯 (Ⅲ) outside kink	外弯 (Ⅲ) outside kink	straight	straight	straight

● MF73T-2产品标志说明 Specification

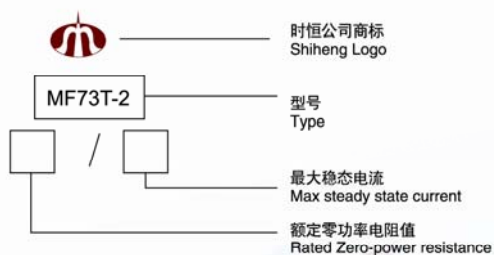

● MF73T-2 外形尺寸(单位mm) Dimensions (mm)

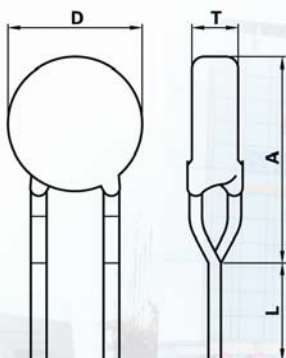

本体尺寸	Φ20	Φ25	Φ30	Φ35	Φ40
外径 (Dmax)	22.5	29	35	40	45
厚度 (Tmax)	10	12	15	18	18
间距 (F±1.5)	10.0	10.0	18	18	18
引线直径 (d±0.05)	1.2	1.2	1.6	2.0	2.0 (2.6)
引线长度 (L) min	17	17	17	17	17
高度 (A) max	38	40	55	58	60
常规引线形状 Regular load Shape	前后弯 Y kink	前后弯 Y kink	前后弯 Y kink	前后弯 Y kink	前后弯 Y kink



MF73T大功率型NTC热敏电阻系列

MF73T High-power NTC Thermistor series

● 主要技术参数 Main Technical parameters

工作温度 Working temperature: D3-D5: -40~+150℃、D8-D10: -40~+170℃、D13-D40: -40~+200℃

型号 Part No. MF73T	R25 ± 20% (Ω)	热敏指数 Thermal index B ± 10% (K)	最大稳态电流 Max Steady State Current I _{max} (A)	最大电流时近似电阻值 Approx. R of Max. Current R _{max} (Ω)	最大额定功耗 Max rated Power P _{max} (W)	最大冲击电容量 Max surge capacitance (μ F)240V/AC
本体直径：Φ3mm						
MF73T-1 5/2	5	2500	2	0.493	1.5	100
MF73T-1 8/1	8	2600	1	1.025		100
MF73T-1 10/1	10	2600	1	1.223		100
MF73T-1 20/0.7	20	2600	0.7	3.011		100
MF73T-1 25/0.7	25	2600	0.7	3.461		47
MF73T-1 30/0.7	30	2600	0.7	3.651		47
MF73T-1 50/0.3	50	2600	0.3	7.346		47
本体直径：Φ5mm						
MF73T-1 1/3.5	1	2500	3.5	0.920	1.8	110
MF73T-1 1.5/3	1.5	2500	3	0.131		110
MF73T-1 2.5/3	2.5	2500	3	0.172		110
MF73T-1 3/2.5	3	2500	2.5	0.192		110
MF73T-1 5/2.5	5	2500	2.5	0.261		110
MF73T-1 8/2	8	2600	2	0.520		110
MF73T-1 10/2	10	2600	2	0.542		110
MF73T-1 12/1.5	12	2600	1.5	0.623		110
MF73T-1 13/1.5	13	2600	1.5	0.653		110
MF73T-1 15/1.2	15	2600	1.2	0.753		110
MF73T-1 16/1.2	16	2600	1.2	1.132		110
MF73T-1 20/1	20	2600	1	1.544		110
MF73T-1 22/1	22	2600	1	1.604		110
MF73T-1 30/1	30	2600	1	1.715		68
MF73T-1 33/0.8	33	2600	0.8	1.898		68
MF73T-1 36/0.8	36	2600	0.8	1.909		68
MF73T-1 50/0.8	50	2800	0.8	2.258		68
MF73T-1 60/0.6	60	2800	0.6	3.069		47
MF73T-1 100/0.6	100	3000	0.6	3.958		47
MF73T-1 200/0.3	200	3200	0.3	16.100		47
本体直径：Φ8mm						
MF73T-1 0.7/7	0.7	2600	7	0.032	2.5	220
MF73T-1 1/6	1	2600	6	0.040		220
MF73T-1 1.3/6	1.3	2600	6	0.056		220
MF73T-1 1.5/6	1.5	2600	6	0.078		220
MF73T-1 2/5	2	2600	5	0.098		220
MF73T-1 2.5/5	2.5	2600	5	0.107		220
MF73T-1 3/5	3	2600	5	0.109		220
MF73T-1 4/4	4	2600	4	0.171		220
MF73T-1 5/4	5	2600	4	0.180		220
MF73T-1 6/4	6	2600	4	0.182		220
MF73T-1 7/3	7	2800	3	0.258		220
MF73T-1 8/3	8	2800	3	0.278		220
MF73T-1 10/3	10	2800	3	0.297		220
MF73T-1 12/2.5	12	2800	2.5	0.414		150
MF73T-1 15/2.5	15	2800	2.5	0.425		150
MF73T-1 16/2.5	16	2800	2.5	0.428		150
MF73T-1 20/2	20	3000	2	0.646		150
MF73T-1 22/2	22	3000	2	0.653		150
MF73T-1 30/2	30	3000	2	0.700		150
MF73T-1 33/1.5	33	3000	1.5	1.139		150

注: 若非特别指出, R_{25} 的允许偏差为 $\pm 20\%$

Remark: Unless the particular indication, the allowable tolerance of R_{25} is $\pm 20\%$.



MF73T 大功率型NTC热敏电阻系列

MF73T High-power NTC Thermistor series

● 主要技术参数 Main Technical parameters

工作温度Working temperature: D3-D5: -40~+150℃、D8-D10: -40~+170℃、D13-D40: -40~+200℃

型号 Part No. MF73T	R25 ± 20% (Ω)	热敏指数 Thermal index B ± 10% (K)	最大稳态电流 Max Steady State Current I _{max} (A)	最大电流时近似电阻值 Approx. R of Max .Current R _{max} (Ω)	最大额定功耗 Max rated Power P _{max} (W)	最大冲击电容量 Max surge capacitance (μ F)240V/AC
本体直径：Φ8mm						
MF73T-1 47/1.5	47	3200	1.5	1.172	2.5	150
MF73T-1 50/1.5	50	3200	1.5	1.174		150
MF73T-1 60/1.2	60	3200	1.2	1.784		150
MF73T-1 80/1.2	80	3200	1.2	1.825		150
MF73T-1 120/1.2	120	3200	1.2	2.007		150
MF73T-1 200/0.8	200	3400	0.8	4.152		100
MF73T-1 220/0.8	220	3400	0.8	4.227		100
MF73T-1 400/0.5	400	3600	0.5	9.956		100
本体直径：Φ10mm						
MF73T-1 0.7/8	0.7	2600	8	0.041	2.8	470
MF73T-1 1/7	1	2600	7	0.062		470
MF73T-1 1.3/7	1.3	2600	7	0.07		470
MF73T-1 1.5/7	1.5	2600	7	0.072		470
MF73T-1 2/6	2	2600	6	0.073		470
MF73T-1 2.5/6	2.5	2600	6	0.075		470
MF73T-1 3/6	3	2600	6	0.080		470
MF73T-1 4/5	4	2600	5	0.090		470
MF73T-1 5/5	5	2800	5	0.100		470
MF73T-1 6/5	6	2800	5	0.120		470
MF73T-1 7/4	7	2800	4	0.144		470
MF73T-1 8/4	8	2800	4	0.155		470
MF73T-1 10/4	10	2800	4	0.175		470
MF73T-1 12/4	12	2800	4	0.192		470
MF73T-1 15/3	15	2800	3	0.230		330
MF73T-1 16/3	16	2800	3	0.250		330
MF73T-1 20/3	20	3000	3	0.270		330
MF73T-1 22/3	22	3000	3	0.285		330
MF73T-1 25/2.5	25	3000	2.5	0.310		330
MF73T-1 30/2.5	30	3000	2.5	0.352		330
MF73T-1 33/2.5	33	3000	2.5	0.384		330
MF73T-1 50/2	50	3200	2	0.450		330
MF73T-1 60/2	60	3200	2	0.540		330
MF73T-1 80/2	80	3200	2	0.820		220
MF73T-1 120/1.5	120	3000	1.5	1.268		220
MF73T-1 200/1.3	200	3200	1.3	2.895		220
本体直径：Φ13mm						
MF73T-1 0.7/9	0.7	2600	9	0.032	4.0	680
MF73T-1 1/9	1	2600	9	0.032		680
MF73T-1 1.3/9	1.3	2600	9	0.042		680
MF73T-1 1.5/9	1.5	2600	9	0.043		680
MF73T-1 2.5/8	2.5	2600	8	0.048		680
MF73T-1 3/8	3	2600	8	0.052		680
MF73T-1 4/7	4	2800	7	0.068		560
MF73T-1 5/7	5	2800	7	0.078		560
MF73T-1 6/6	6	2800	6	0.090		560
MF73T-1 7/6	7	3000	6	0.098		560
MF73T-1 8/6	8	3000	6	0.104		560
MF73T-1 10/6	10	3000	6	0.126		560
MF73T-1 12/5	12	3200	5	0.146		560

注: 若非特别指出, R_{25} 的允许偏差为 $\pm 20\%$

Remark: Unless the particular indication, the allowable tolerance of R_{25} is $\pm 20\%$.



MF73T大功率型NTC热敏电阻系列

MF73T High-power NTC Thermistor series

● 主要技术参数 Main Technical parameters

工作温度 Working temperature: D3-D5: -40~+150℃、D8-D10: -40~+170℃、D13-D40: -40~+200℃

型号 Part No. MF73T	R ₂₅ ± 20% (Ω)	热敏指数 Thermal index B ± 10% (K)	最大稳态电流 Max Steady State Current I _{max} (A)	最大电流时近似电阻值 Approx. R of Max. Current R _{max} (Ω)	最大额定功耗 Max rated Power P _{max} (W)	最大冲击电容量 Max surge capacitance (μ F/240V/AC
本体直径： Φ13mm						
MF73T-1 15/4	15	3200	4	0.155	4.0	560
MF73T-1 16/4	16	3200	4	0.158		560
MF73T-1 20/4	20	3200	4	0.192		560
MF73T-1 30/3.5	30	3200	3.5	0.237		560
MF73T-1 47/3	47	3200	3	0.340		560
MF73T-1 60/2.5	60	3200	2.5	0.420		560
MF73T-1 80/2.5	80	3200	2.5	0.820		560
MF73T-1 120/1.8	120	3400	1.8	0.994		560
本体直径： Φ15mm						
MF73T-1 0.7/11	0.7	2600	11	0.024	5.0	1000
MF73T-1 1/10.5	1	2600	10.5	0.030		1000
MF73T-1 1.3/10	1.3	2600	10	0.034		820
MF73T-1 1.5/10	1.5	2600	10	0.036		820
MF73T-1 2/9.5	2	2600	9.5	0.040		820
MF73T-1 2.5/9.5	2.5	2600	9.5	0.044		820
MF73T-1 3/9	3	2800	9	0.046		820
MF73T-1 5/8	5	3000	8	0.058		820
MF73T-1 6/7	6	3000	7	0.069		680
MF73T-1 7/7	7	3000	7	0.078		680
MF73T-1 8/7	8	3000	7	0.084		680
MF73T-1 10/7	10	3200	7	0.098		680
MF73T-1 12/6	12	3200	6	0.116		680
MF73T-1 15/6	15	3200	6	0.125		680
MF73T-1 16/6	16	3200	6	0.129		680
MF73T-1 20/6	20	3200	6	0.136		680
MF73T-1 22/5	20	3200	5			680
MF73T-1 30/5	30	3200	5	0.165		680
MF73T-1 47/4	47	3200	4	0.257		680
MF73T-1 55/4	55	3200	4	0.287		680
MF73T-1 120/2.5	120	3400	2.5	0.652		680
本体直径： Φ20mm						
MF73T-1 0.7/16	0.7	2600	16	0.026	7.0	1500
MF73T-2 0.7/16				0.026		3000
MF73T-1 1/16	1	2600	16	0.027		1500
MF73T-2 1/16				0.027		3000
MF73T-1 1.5/15	1.5	2600	15	0.030		1500
MF73T-2 1.5/15				0.030		3000
MF73T-1 2/14	2	2600	14	0.035		1500
MF73T-2 2/14				0.035		3000
MF73T-1 2.5/13	2.5	2800	13	0.038		1500
MF73T-2 2.5/13				0.038		3000
MF73T-1 3/12	3	2800	12	0.040		1200
MF73T-2 3/12				0.040		2200
MF73T-1 4/12	4	2800	12	0.043		1200
MF73T-2 4/12				0.043		2200
MF73T-1 4.7/12	4.7	3000	12	0.046		1200
MF73T-2 4.7/12				0.046		2200
MF73T-1 5/12	5	3000	12	0.047		1200
MF73T-2 5/12				0.047		2200

注: 若非特别指出, R_{25} 的允许偏差为 $\pm 20\%$

Remark: Unless the particular indication, the allowable tolerance of R_{25} is $\pm 20\%$.



MF73T 大功率型NTC热敏电阻系列

MF73T High-power NTC Thermistor series

● 主要技术参数 Main Technical parameters

工作温度 Working temperature: D3-D5: -40~+150℃、D8-D10: -40~+170℃、D13-D40: -40~+200℃

型号 Part No. MF73T	R25 ± 20% (Ω)	热敏指数 Thermal index B ± 10% (K)	最大稳态电流 Max Steady State Current I _{max} (A)	最大电流时近似电阻值 Approx. R of Max. Current R _{max} (Ω)	最大额定功耗 Max rated Power P _{max} (W)	最大冲击电容量 Max surge capacitance (μ F)240V/AC
本体直径：Φ20mm						
MF73T-1 6/11	6	3000	11	0.052	7.0	1000
MF73T-2 6/11						1500
MF73T-1 6.8/10	6.8	3000	10	0.055		1000
MF73T-2 6.8/10						1500
MF73T-1 7/9	7	3000	9	0.056		1000
MF73T-2 7/9						1500
MF73T-1 8/9	8	3000	9	0.058		1000
MF73T-2 8/9						1500
MF73T-1 10/8	10	3000	8	0.085		1000
MF73T-2 10/8						1500
MF73T-1 12/7.5	12	3200	7.5	0.098		1000
MF73T-2 12/7.5						1500
MF73T-1 15/7	15	3200	7	0.112		1000
MF73T-2 15/7						1500
MF73T-1 18/7	18	3200	7	0.123		1000
MF73T-2 18/7						1500
MF73T-1 20/7	20	3200	7	0.132		1000
MF73T-2 20/7						1500
MF73T-1 25/6	25	3200	6	0.168		1000
MF73T-2 25/6						1500
MF73T-1 30/6	30	3200	6	0.195		1000
MF73T-2 30/6						1500
MF73T-1 47/5	47	3200	5	0.325		1000
MF73T-2 47/5						1500
MF73T-1 60/4	60	3200	4	0.525		1000
MF73T-2 60/4						1500
MF73T-1 120/3	120	3200	3	0.658		1000
MF73T-2 120/3						1500
本体直径：Φ25mm						
MF73T-1 0.5/22	0.5	2600	22	0.017	9.0	2200
MF73T-2 0.5/22						3500
MF73T-1 0.7/22	0.7	2600	22	0.018		2200
MF73T-2 0.7/22						3500
MF73T-1 1/20	1	2600	20	0.021		2200
MF73T-2 1/20						3500
MF73T-1 1.5/19	1.5	2600	19	0.024		2200
MF73T-2 1.5/19						3500
MF73T-1 2/18	2	2600	18	0.026		2200
MF73T-2 2/18						3500
MF73T-1 2.5/16	2.5	2800	16	0.029		2200
MF73T-2 2.5/16						3500
MF73T-1 3/15.5	3	2800	15.5	0.032		1500
MF73T-2 3/15.5						2800
MF73T-1 4/15	4	2800	15	0.039		1500
MF73T-2 4/15						2800
MF73T-1 4.7/14	4.7	3000	14	0.044		1500
MF73T-2 4.7/14						2800
MF73T-1 5/14	5	3000	14	0.047		1500
MF73T-2 5/14						2800

注: 若非特别指出, R_{25} 的允许偏差为 $\pm 20\%$
Remark: Unless the particular indication, the allowable tolerance of R_{25} is $\pm 20\%$.



MF73T 大功率型NTC热敏电阻系列

MF73T High-power NTC Thermistor series

● 主要技术参数 Main Technical parameters

工作温度Working temperature: D3-D5: -40~+150℃、D8-D10: -40~+170℃、D13-D40: -40~+200℃

型号 Part No. MF73T	R ₂₅ ± 20% (Ω)	热敏指数 Thermal index B ± 10% (K)	最大稳态电流 Max Steady State Current I _{max} (A)	最大电流时近似电阻值 Approx. R of Max. Current R _{max} (Ω)	最大额定功耗 Max rated Power P _{max} (W)	最大冲击电容量 Max surge capacitance (μ F)240V/AC
本体直径： Φ25mm						
MF73T-1 6.8/12	6.8	3000	12	0.061	9.0	1500
MF73T-2 6.8/12						2800
MF73T-1 7/11	7	3000	11	0.064		1500
MF73T-2 7/11						2800
MF73T-1 8/10	8	3200	10	0.079		1200
MF73T-2 8/10						2200
MF73T-1 10/10	10	3200	10	0.084		1200
MF73T-2 10/10						2200
MF73T-1 12/9	12	3200	9	0.102		1200
MF73T-2 12/9						2200
MF73T-1 15/8	15	3200	8	0.117		1200
MF73T-2 15/8						2200
MF73T-1 18/8	18	3200	8	0.125		1200
MF73T-2 18/8						2200
MF73T-1 20/8	20	3200	8	0.132		1200
MF73T-2 20/8						2200
本体直径： Φ30mm						
MF73T-1 0.5/30	0.5	2600	30	0.013	13	3000
MF73T-2 0.5/30						4700
MF73T-1 1/30	1	2600	30	0.014		3000
MF73T-2 1/30						4700
MF73T-1 1.5/25	1.5	2600	25	0.016		3000
MF73T-2 1.5/25						4700
MF73T-1 2/23	2	2600	23	0.019		3000
MF73T-2 2/23						4700
MF73T-1 2.5/20	2.5	2800	20	0.023		3000
MF73T-2 2.5/20						4700
MF73T-1 3/19.5	3	2800	19.5	0.026		2200
MF73T-2 3/19.5						4700
MF73T-1 4/19	4	2800	19	0.031		2200
MF73T-2 4/19						4700
MF73T-1 4.7/18	4.7	3000	18	0.035		2200
MF73T-2 4.7/18						4700
MF73T-1 5/17	5	3000	17	0.037		2200
MF73T-2 5/17						4700
MF73T-1 6/17	6	3000	17	0.042		1500
MF73T-2 6/17						3300
MF73T-1 6.8/16	6.8	3000	16	0.043		1500
MF73T-2 6.8/16						3300
MF73T-1 7/15	7	3000	15	0.044		1500
MF73T-2 7/15						3300
MF73T-1 8/14	8	3200	14	0.049		1500
MF73T-2 8/14						3300
MF73T-1 10/13	10	3200	13	0.056		1500
MF73T-2 10/13						3300
MF73T-1 12/12	12	3200	12	0.067		1500
MF73T-2 12/12						3300
MF73T-1 15/11	15	3200	11	0.078		1500
MF73T-2 15/11						3300
MF73T-1 18/10	18	3200	10	0.092		1500
MF73T-2 18/10						3300

注: 若非特别指出, R_{25} 的允许偏差为 $\pm 20\%$

Remark: Unless the particular indication, the allowable tolerance of R_{25} is $\pm 20\%$.



MF73T 大功率型NTC热敏电阻系列

MF73T High-power NTC Thermistor series

● 主要技术参数 Main Technical parameters

工作温度Working temperature: D3-D5: -40~+150℃、D8-D10: -40~+170℃、D13-D40: -40~+200℃

型号 Part No. MF73T	R ₂₅ ± 20% (Ω)	热敏指数 Thermal index B ± 10% (K)	最大稳态电流 Max Steady State Current I _{max} (A)	最大电流时近似电阻值 Approx. R of Max. Current R _{max} (Ω)	最大额定功耗 Max rated Power P _{max} (W)	最大冲击电容量 Max surge capacitance (μ F) 240V/AC
本体直径： Φ30mm						
MF73T-1 20/9	20	3200	9	0.113	13	1500
MF73T-2 20/9						3300
本体直径： 35mm						
MF73T-1 0.5/32	0.5	2600	32	0.01	17	3300
MF73T-2 0.5/32						4700
MF73T-1 1/32	1	2600	32	0.011		3300
MF73T-2 1/32						4700
MF73T-1 1.5/28	1.5	2600	28	0.013		3300
MF73T-2 1.5/28						4700
MF73T-1 2/25	2	2600	25	0.017		3300
MF73T-2 2/25						4700
MF73T-1 2.5/23	2.5	2800	23	0.020		3300
MF73T-2 2.5/23						4700
MF73T-1 3/22	3	2800	22	0.023		3000
MF73T-2 3/22						4700
MF73T-1 4/21	4	2800	21	0.026		3000
MF73T-2 4/21						4700
MF73T-1 4.7/20	4.7	3000	20	0.029		3000
MF73T-2 4.7/20						4700
MF73T-1 5/19	5	3000	19	0.030		3000
MF73T-2 5/19						4700
MF73T-1 6.8/18	6.8	3000	18	0.035		2200
MF73T-2 6.8/18						3300
MF73T-1 7/17	7	3000	17	0.037		2200
MF73T-2 7/17						3300
MF73T-1 8/16	8	3200	16	0.041		2200
MF73T-2 8/16						3300
MF73T-1 10/15	10	3200	15	0.045		2200
MF73T-2 10/15						3300
MF73T-1 12/14	12	3200	14	0.051		2200
MF73T-2 12/14						3300
MF73T-1 15/13	15	3200	13	0.060		2200
MF73T-2 15/13						3300
MF73T-1 18/11	18	3200	11	0.072		2200
MF73T-2 18/11						3300
MF73T-1 20/10	20	3200	10	0.089		2200
MF73T-2 20/10						3300
本体直径： 40mm						
MF73T-1 0.2/40	0.2	2600	40	0.005	23	4700
MF73T-2 0.2/40						8000
MF73T-1 0.5/40	0.5	2600	40	0.008		4700
MF73T-2 0.5/40						6800
MF73T-1 1/40	1	2600	40	0.010		4700
MF73T-2 1/40						6800
MF73T-1 1.5/36	1.5	2600	36	0.012		4700
MF73T-2 1.5/36						6800
MF73T-1 2/32	2	2600	32	0.014		4700
MF73T-2 2/32						6800

注: 若非特别指出, R_{25} 的允许偏差为 $\pm 20\%$
Remark: Unless the particular indication, the allowable tolerance of R_{25} is $\pm 20\%$.



MF73T 大功率型NTC热敏电阻系列

MF73T High-power NTC Thermistor series

● 主要技术参数 Main Technical parameters

工作温度 Working temperature: D3-D5: $-40\sim+150^{\circ}\text{C}$ 、D8-D10: $-40\sim+170^{\circ}\text{C}$ 、D13-D40: $-40\sim+200^{\circ}\text{C}$

型号 Part No. MF73T	R25 ± 20% (Ω)	热敏指数 Thermal index B ± 10% (K)	最大稳态电流 Max Steady State Current I _{max} (A)	最大电流时近似电阻值 Approx. R of I _{max} Current R _{max} (Ω)	最大额定功耗 Max rated Power P _{max} (W)	最大冲击电容量 Max surge capacitance (μ F)240V/AC	
本体直径: Φ40mm							
MF73T-1 2.5/30	2.5	2800	30	0.018	23	4700	
MF73T-2 2.5/30						6800	
MF73T-1 3/28	3	2800	28	0.020		3300	
MF73T-2 3/28						4700	
MF73T-1 4/27	4	2800	27	0.022		3300	
MF73T-2 4/27						4700	
MF73T-1 4.7/26	4.7	3000	26	0.023		3300	
MF73T-2 4.7/26						4700	
MF73T-1 5/25	5	3000	25	0.028		3300	
MF73T-2 5/25						4700	
MF73T-1 6.8/23	6.8	3000	23	0.030		3000	
MF73T-2 6.8/23						4700	
MF73T-1 8/20	8	3200	20	0.034		3000	
MF73T-2 8/20						4700	
MF73T-1 10/19	10	3200	19	0.038		3000	
MF73T-2 10/19						4700	
MF73T-1 12/18	12	3200	18	0.040		3000	
MF73T-2 12/18						4700	
MF73T-1 15/16	15	3200	16	0.050		3000	
MF73T-2 15/16						4700	
MF73T-1 18/14	18	3200	14	0.062		3000	
MF73T-2 18/14						4700	
MF73T-1 20/13	20	3200	13	0.075		3000	
MF73T-2 20/13						4700	

注: 若非特别指出, R_{25} 的允许偏差为 $\pm 20\%$

Remark: Unless the particular indication, the allowable tolerance of R_{25} is $\pm 20\%$.